


CABLE ASSEMBLY 8V5-20

**REF DIMENSIONS ONLY.
CONSULT FACTORY FOR ACTUAL DIMENSIONS.**



STANDARD WIRING

PIN	WIRE
A	RED
B	BLACK
C	WHITE
D	GREEN
E	BLUE
F	BROWN

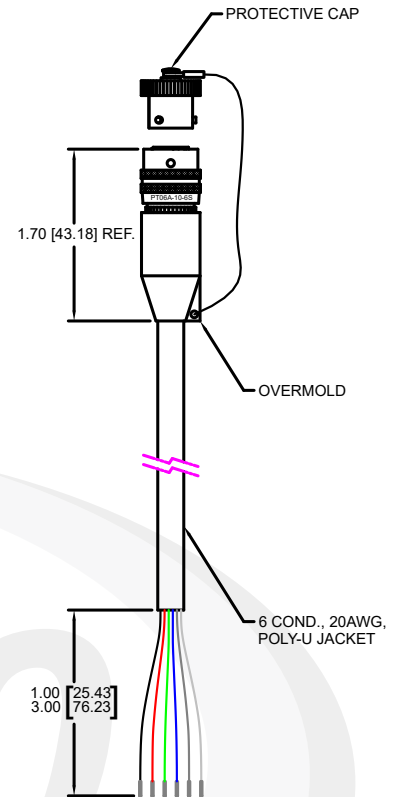

FEATURES:

- Polyurethane jacketed cable with water tight over-mold protection
- 6 Conductor, 18 awg with foil & drain
- 6 Pin Amphenol PT06A-10-6S connector with protective cap

SPECIFICATIONS:

Jacket:

- Pressure Extruded Black Polyurethane (PU)
- Wall thickness nominal .050 inches
- Outside diameter (OD) nominal .290 inches, $\pm .010$ inches

Conductor (6 x 20 AWG Singles):

- 20 Gauge Tinned Copper Wire
- 10/30 Stranding

Insulation:

- Polypropylene (PP)
- Outside diameter (OD) nominal ± 0.3 inches

Conductor Color Code:

- Black, Brown, Red, Green, Blue, White
- **Rating:**
- 600 Volts
- +80 °C

RoHS – This product complies with Article 4 (1) of Directive 2002/95/ EC on the restriction of use of certain hazardous substances in electrical and electronic equipment.